

CERTIFIED SERIES PUMP



The Fogco Certified Series pump range includes our pulley drive and direct drive products designed for 115V and 230V 50 Hz. This Series is CE certified for distribution within the European Union.

- **Patented pump design**
- **Outdoor rated 1000psi**
- **Oversized pump for quiet, efficient, low RPM operation**
- **Vented cover with exhaust fan**
- **Low Pressure or Low Flow Safety Switch**
- **Thermal relief valve**
- **Adjustable pressure regulator with bypass**
- **Glycerin filled pressure gauge**
- **Oil drain tube**
- **Hour meter**

The pulley driven pump range is assembled within a treated and powder coated enclosure with an inlet solenoid valve, an adjustable pressure regulator with bypass, thermal relief valve, hour meter, glycerin filled pressure gauge, and low water safety switch. The safety switch ensures the safe operation of the pump and eliminates premature seal failure by preventing the pump from running without sufficient water supply. All Certified Pumps carry a 3 year warranty.

The Direct Drive pump range includes an inlet solenoid valve, a low water safety switch, a glycerin filled pressure gauge, a thermal relief valve, and an adjustable pressure regulator with bypass. The range is designed for single zone applications. The direct drive pumps are the preferred choice for applications when quality and value are the primary considerations. Consult our Customer Service Department for details and assistance

- **Low 1750 RPM**
- **Preset 1000psi/70bar**
- **Easy access pressure adjustment**
- **Heavy duty triplex ceramic plunger pump**
- **Low Pressure Safety Switch**
- **Thermal relief valve**
- **Adjustable pressure regulator with bypass**
- **Glycerin filled pressure gauge**
- **Solenoid valve to control inlet water supply**
- **6 foot power cord**
- **One Year Warranty**

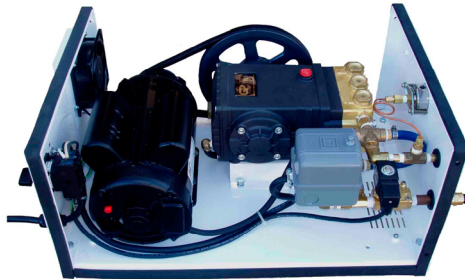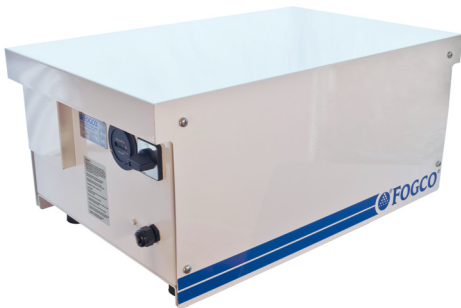

Model Number	LPM	Nozzle Capacity**	Pressure Rating	HP Rating	Volts/Phase	Amp Rating	Dimensions L x H x W cm	Weight kg
7200215	2	8-16	70 BAR	1.0	230/1	7.3	66x41x30	50
7400215	4	16-32	70 BAR	1.0	230/1	7.3	66x41x30	50
7800215	8	32-64	70 BAR	1.5	230/1	11.2	66x41x30	54
7120215	12	64-96	70BAR	3.0	230/1	13	66x41x30	59
Model Number	LPM	Nozzle Capacity**	Pressure Rating	HP Rating	Volts/Phase	Amp Rating	Dimensions L x H x W cm	Weight kg
8100215	1	4-8	70 BAR	1.0	230/1	7.3	20X56X25	22
8200215	2	8-16	70 BAR	1.0	230/1	7.3	20X56X25	25
8300215	3	12-24	70 BAR	1.0	230/1	7.3	20X56X25	27
8400215	4	16-32	70BAR	1.0	230/1	7.3	20X56X25	27
8700215	7	28-56	70BAR	1.5	230/1	11.2	20X56X25	29